

AW-FP100 Series Fire Alarm Control Panel is intelligent panel which are carefully designed to make it suitable for most of applications. It can be configured with other panels or control systems.


Its user friendly functionality makes it suitable to program and configure the devices. 7" touch-screen display gives the information for fire alarm, trouble, supervisory and other related information all the time.



Features

- ✓ 7" Touch-screen LCD color display
- ✓ Two-wire cable for all addressable devices
- ✓ Mini-printer to print the status of events
- ✓ Graphic remote monitor access system
- ✓ Access level entry to control and configure panel
- ✓ Meets all requirements of latest EN 54-2&EN54-4

Installation

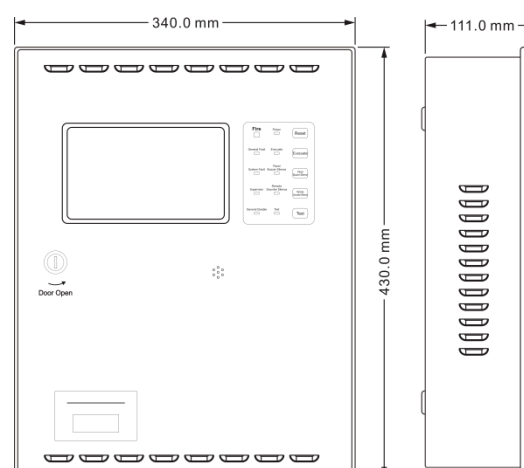

Technical Specification

Model	AW-FP101/AW-FP102
Main power	110 VAC or 220VAC ($\pm 20\%$) 50Hz/60Hz
Batteries	2*12V,5Ah Lead acid batteries
Battery low-voltage protection	21V
Number of points on each loop	250 pcs
Environmental	Temperature range: -10 to 55°C (14~134°F); Relative humidity: 5 to 95%, non-condensing
Network available options	GSM/IP/Cloud/Mobile Apps
Fuse for AC power	1A/250V glass tube fuse, slow blow, 5*20mm
Fuse for DC power	10A/250V ceramics tube fuse slow blow 5*20mm
Terminal blocks rating	All terminals rated for 12 to 18 AWG (0.75 to 2.5 mm ²)
Size (L*W*H)	430mm* 340mm* 111mm